


MF-KD (metr.)

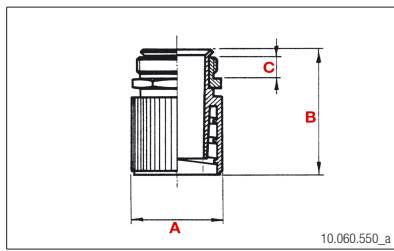

MAT
PE / Messing vern.
PE / Laiton nick.
PE / Brass nick. pl.

TEMP
-40°C – +90°C

 IP 54

Spiralwendelverschraubung MF-KD











Mit konischer Innentülle, lässt sich leicht montieren, drehbares, metrisches Gewinde.

Raccord pivotant spiralé MF-KD

Avec douille interne conique, serrage facile. Filetage métrique.

Swivel fitting MF-KD

With internal conical housing, can be easily removed. Metric thread.

	NORM NW/DN	A mm	B mm	C mm	 mm		Plica-Nr.	E-Nr.	VE
M16	9	18.0	36.0	6.0	16		80.3403.016	126 471 400	50
M20	11	21.6	38.5	7.5	20		80.3403.020	126 471 500	50
	13.5	25.0	38.5	7.5	20		80.3403.021	126 471 501	50
M25	16	26.0	41.0	8.0	25		80.3403.025	126 471 600	50
M32	21	32.0	48.0	8.0	32		80.3403.032	126 471 700	25
M40	29	38.9	52.5	8.0	40		80.3403.040	126 471 800	25
M50	36	48.5	53.5	9.5	50		80.3403.050	126 471 900	25